



NATIONAL SECURITY AGENCY CYBERSECURITY INFORMATION

MANAGING RISK FROM TRANSPORT LAYER SECURITY INSPECTION

WITH GREAT POWER...

To protect enterprise data and intellectual property, network security administrators enforce encryption policies to secure traffic to and from their networks. However, adversaries also use encryption, often using it to hide their activities. Normally, these activities—like command and control, loading malware into a network, and exfiltration of sensitive data—would be detected by traffic inspection devices, but those devices typically cannot inspect encrypted traffic.

Transport Layer Security Inspection (TLSI), also known as Transport Layer Security (TLS) break and inspect, is a security mechanism that allows enterprises to decrypt traffic, inspect the decrypted content for threats, and then re-encrypt the traffic before it enters or leaves the network. Introducing this capability into an enterprise enhances visibility within boundary security products, but introduces new risks. These risks, while not inconsequential, do have mitigations.

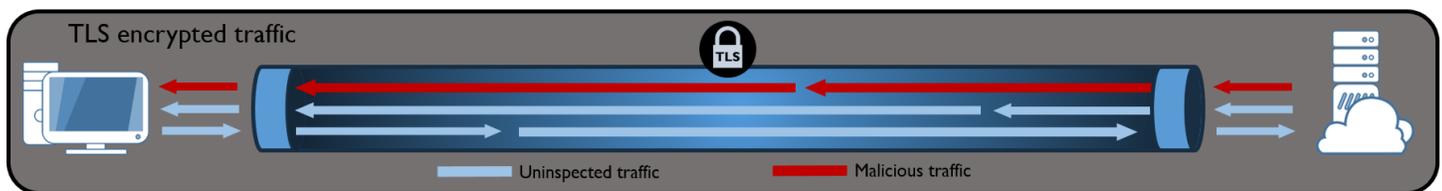


Figure 1a: Encrypted Traffic

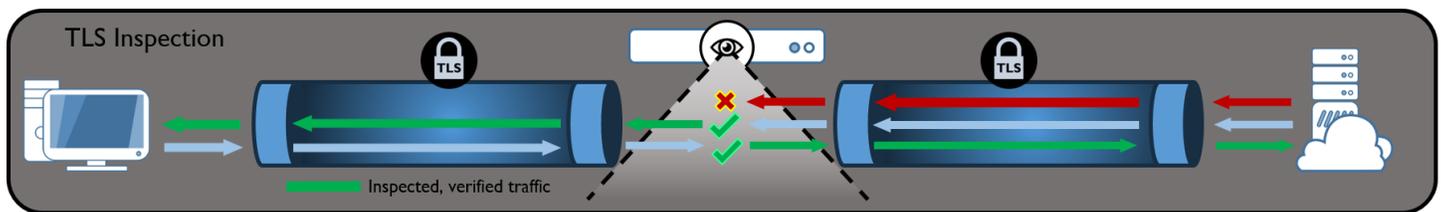


Figure 1b: TLS Inspection

- a.) A TLS channel is negotiated between the client and the server. All of the data that passes through the channel is encrypted and therefore not subject to inspection.
- b.) The device conducting TLSI replaces the TLS channel with a TLS chain, breaking the encryption on the data, inspecting it, and blocking it, if it is malicious.

DIGGING IN – WHAT IS TLSI?

TLSI is typically performed by a proxy device to expose the underlying plaintext of a TLS session. This enables traffic inspection devices like firewalls, intrusion detection systems, and intrusion prevention systems (IDS/IPS) to detect indicators of threat or compromise. Here, TLSI also includes the inspection of legacy Secure Sockets Layer (SSL) traffic. Discussed in detail are the three main functions of the TLSI mechanism in a forward proxy: managing forward proxy traffic flows, establishing TLS sessions, and issuing trusted certificates. Risks become apparent as the detailed mechanism TLSI employs is understood.

Forward Proxy Traffic Flows

A forward proxy is a network device that intercepts requests from internal network clients and forwards those requests to servers on external networks. When the external servers respond, the responses are sent to the forward proxy and then the forward proxy sends the responses to the internal network clients. A TLSI capability implemented within a forward proxy between the edge of the enterprise network and an external network such as the Internet protects enterprise clients from the high risk environment outside the forward proxy.

unexpectedly drop or hang. If the TLSI implementation cannot properly inspect TLS sessions protecting these applications, the sessions should be bypassed or blocked, according to the risk associated with the traffic.

For example:

- TLS 1.3 implements restrictions that do not allow certain shortcuts commonly used in TLSI products. TLSI can cause sessions to fail for applications that use TLS 1.3 exclusively.
- External servers requiring client authenticated TLS will not trust the TLSI's signing certificate and will reject sessions using client certificates issued by the embedded CA.
- TLS Token Binding binds security tokens to the specific TLS session used. TLSI systems can cause the sessions or tokens to be rejected by the client application, the server, or both.
- Hypertext Transfer Protocol Strict Transport Security (HSTS) requires that Hypertext Transfer Protocol over TLS (HTTPS) is used in the future with trusted certificates and that all content is received via HTTPS as well. If a TLS client application attempts to follow the HSTS requirements but does not trust the separate TLSI CA, the client will reject the TLSI sessions and prevent users from clicking-through browser warnings.
- TLSI can also cause sessions to fail in unexpected ways if they use client-level certificate pinning. Certificate pinning is commonly used for automated software updates.
- Domain Name System-Based Authentication of Named Entities (DANE), another method where an application requires a specific certificate in the TLS session, can also cause a TLSI session failure. DANE is commonly used for securing email server-to-server TLS connections.

Once TLSI is implemented, security administrators must also consistently manage the implementation to ensure that legitimate network processing is not disrupted due to unintended blocking; administrators must balance usability with security. Conduct education and awareness campaigns to inform employees that they may not have access to high risk websites which were previously accessible prior to the TLSI implementation. Set up a corporate help desk to support employees experiencing issues accessing necessary websites. Some TLSI vendor solutions provide additional features for enhancing usability, such as bypassing traffic for known incompatible applications. Enterprises should evaluate the risks and enable these usability features when needed.

Network owners should be aware that TLSI is not a cure-all. It can only inspect SSL and TLS traffic where the proxy's certificate is trusted by clients (and servers for mutual authentication). While some break and inspect devices can block TLS sessions that do not allow inspection, this could also disrupt legitimate activity.

RISK, MINIMIZED

Security administrators cannot protect against what they cannot see. The latest tactics, techniques, and procedures (TTPs) have allowed attackers to leverage encrypted traffic to sneak past traffic monitoring tools. Security professionals have fought against these TTPs through the use of TLSI. TLSI capabilities implemented in enterprise forward proxies can provide visibility into encrypted network traffic to detect adversarial use of encryption, but the devices that break and inspect the TLS traffic may become high priority targets for exploitation and introduce additional risks into an enterprise network. Enterprises must carefully weigh these risks against the benefits of and alternatives to TLSI; and, if TLSI is implemented, address those risks. Moreover, while applications incompatible with TLSI may cause users to experience latency and errors, ongoing management and support helps administrators balance usability with security. The mitigations discussed can reduce the risks a TLSI capability introduces, provide indicators that alert administrators if the TLSI implementation may have been exploited, and minimize unintended blocking of legitimate network activity. In this way, security administrators can successfully add TLSI to their arsenal and continue to step up their methods to combat today's adversaries and TTPs.▪

DISCLAIMER OF WARRANTIES AND ENDORSEMENT

The information and opinions contained in this document are provided "as is" and without any warranties or guarantees. Reference herein to any specific commercial products, process, or service by trade name, trademark, manufacturer, or otherwise, does not constitute or imply its endorsement, recommendation, or favoring by the United States Government, and this guidance shall not be used for advertising or product endorsement purposes.

CONTACT INFORMATION

Client Requirements / General Cybersecurity Inquiries: Cybersecurity Requirements Center (CRC), 410-854-4200, Cybersecurity_Requests@nsa.gov
Media inquiries: Press Desk, 443-634-072, MediaRelations@nsa.gov